


SPEED MF



Submersible DRAINAGE pumps

⇒ for clearwater

SPEED MF

Submersible DRAINAGE pumps

⇒ for clear water



Version with vertical magnetic float switch



PERFORMANCE RANGE

- Flow rate up to **260 l/min** (15.6 m³/h)
- Head up to **10.5 m**

APPLICATION LIMITS

- **3 m** maximum immersion depth
- Maximum liquid temperature **+40 °C**
(Maximum liquid temperature **+90 °C** for a maximum of 3 minutes intermittent service)
- Passage of suspended solids up to **Ø 10 mm**
- Suction down to **14 mm** above ground level
- Continuous service **S1**

CONSTRUCTION AND SAFETY STANDARDS

Complete with:

- **5 m** long power cable
- vertical magnetic float switch

EN 60335-1
IEC 60335-1
CEI 61-150

EN 60034-1
IEC 60034-1
CEI 2-3



INSTALLATION AND USE

The **SPEED MF** series is suitable for use with **clear water** that does not contain abrasive particles and comes complete with a vertical float switch meaning that the pumps **can be used in particularly small spaces**.

As a result of the design solutions that have been adopted, such as the complete cooling of the motor and the shaft with double seal, these pumps are easy to use and reliable.


They are suitable for use in applications such as draining small flooded areas (rooms, cellars, garages) in the event of an emergency, for the disposal of waste water in the home (from dishwashers, washing machines) and for emptying drainage traps.

OPTIONALS AVAILABLE ON REQUEST

- Special mechanical seal
- Pumps with a **10 m** long power cable
⇒ N.B. Standard EN 60335-2-41 states that the power cable must be 10 m long for outdoor applications
- Other voltages or 60 Hz frequency

GUARANTEE

2 years subject to terms and conditions

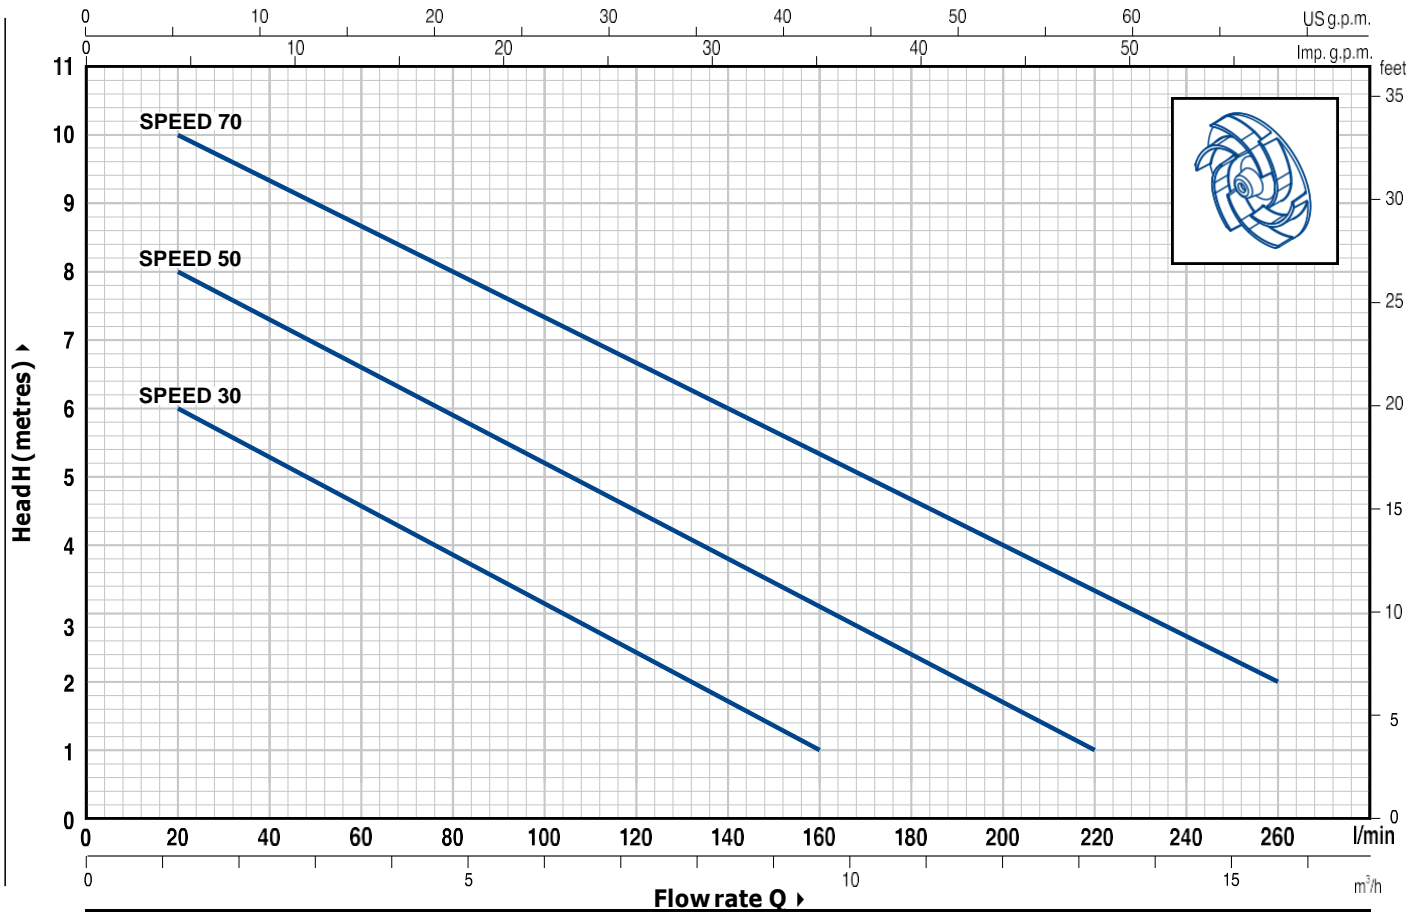

MODEL	POWER		Q	Flowrate														
	kW	HP		0	1.2	2.4	3.6	4.8	6.0	7.2	8.4	9.6	10.8	12	13.2	14.4	15.6	
Single-phase				0	20	40	60	80	100	120	140	160	180	200	220	240	260	
SPEED 30M MF	0.25	0.33	H metres	7	6	5.5	4.5	4	3	2.5	1.8	1						
SPEED 50M MF	0.37	0.50		9	8	7.5	6.5	6	5.5	4.5	4	3	2.5	1.8	1			
SPEED 70M MF	0.55	0.75		10.5	10	9	8.8	8	7.5	6.5	6	5.5	4.8	4	3.5	2.5	2	

Q = Flowrate H = Total manometric head

Tolerance of characteristic curves in compliance with EN ISO 9906 App. A.

POS.	COMPONENT	CONSTRUCTION CHARACTERISTICS			
1	PUMP BODY	Technopolymer			
2	SUCTION FILTER	Technopolymer			
3	SUCTION PLATE	Stainless steel AISI 304			
4	DIFFUSER	Technopolymer			
5	IMPELLER	Noryl GFN2V			
6	MOTOR CASING	Stainless steel AISI 304			
7	MOTOR CASING PLATE	Stainless steel AISI 304			
8	MOTOR SHAFT	Stainless steel EN 10088-3 - 1.4104			
9	SHAFT WITH DOUBLE SEAL AND OIL CHAMBER				
	<i>Seal</i>	<i>Shaft</i>	<i>Materials</i>		
	<i>Model</i>	<i>Diameter</i>	<i>Stationary ring</i>	<i>Rotational ring</i>	<i>Elastomer</i>
	AR-12R	Ø 12 mm	Ceramic	Graphite	NBR
10	LIPSEAL	Ø 12 x Ø 19 x H 5 mm			
11	BEARINGS	6201 ZZ / 6201 ZZ			

12	CAPACITOR		
	<i>Pump</i>	<i>Capacitance</i>	
	<i>Single-phase</i>	<i>(230 V or 240 V)</i>	<i>(110 V)</i>
	SPEED30MF	6.3 µF 450 VL	16 µF 250 VL
	SPEED50MF	10 µF 450 VL	16 µF 250 VL
	SPEED70MF	14 µF 450 VL	16 µF 250 VL

13 ELECTRIC MOTOR

- Single-phase 230 V - 50 Hz with thermal overload protector built-in to the winding
- Insulation: F class
- Protection: IP 68


14 HANDLE ASSEMBLY (resin sealed)

Complete with:


- **5 metre** long "H07 RN-F" power cable with Schuko plug
- Float switch.

15 HOSE CONNECTOR WITH UNION

Ø 25 mm hose connection for **SPEED 30**
 Ø 35 mm for **SPEED 50-70**

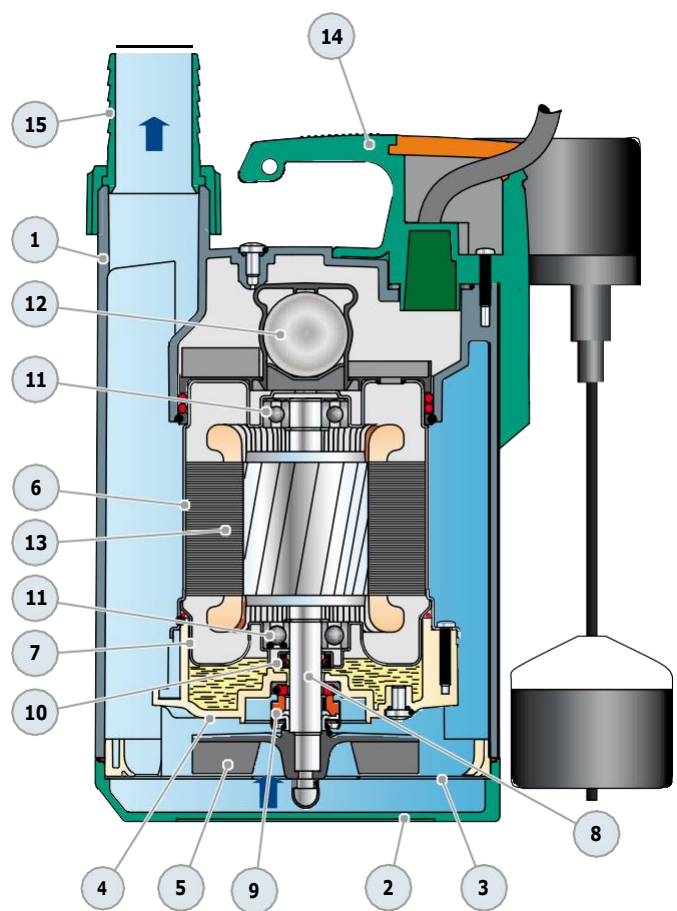

DIMENSIONS AND WEIGHT

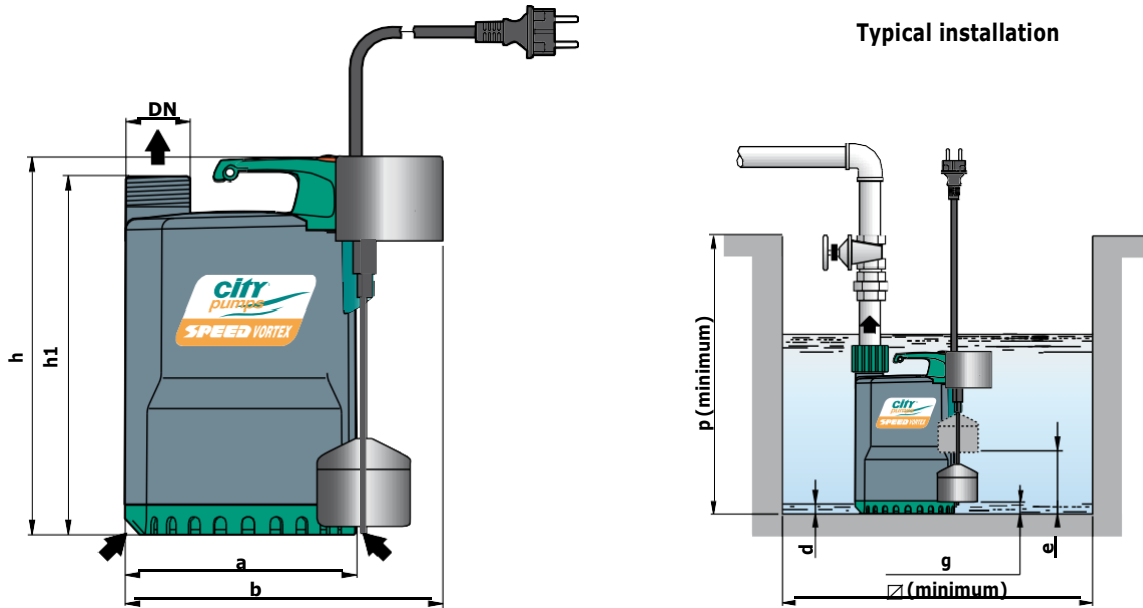


MODEL	PORT DN	DIMENSIONS mm									kg
		a	b	h	h1	d	e	g	p	□	
Single-phase											
SPEED 30M MF	1 1/4"	152	200	257	237	14	140	35	350	220	4.6
SPEED 50M MF				287	267		170	40			5.3
SPEED 70M MF											6.7

ABSORPTION

MODEL	VOLTAGE (single-phase)		
	230 V	240 V	110 V
Single-phase			
SPEED 30M MF	1.3 A	1.3 A	3.0 A
SPEED 50M MF	2.0 A	2.0 A	5.3 A
SPEED 70M MF	3.2 A	3.2 A	7.9 A

PALLETIZATION

MODEL	GROUPAGE			CONTAINER		
	n° pumps	H (mm)	kg	n° pumps	H (mm)	kg
Single-phase						
SPEED 30M MF	96	1260	459	168	2100	790
SPEED 50M MF	96	1260	526	168	2100	910
SPEED 70M MF	96	1500	660	144	2180	982

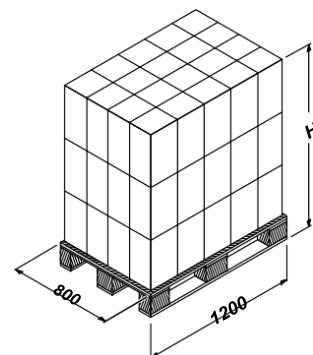

duyar
motorpompa®

duyar
motorpompa®

Adres :1490 Sokak No:2 E-F Ege Ticaret Merkezi YENİŞEHİR/İZMİR

Tel :+90 232 449 16 46 +90 232 449 14 72

Gsm :+90 533 658 81 68

email : info@duyarmotor.com